
SEALECTION™ 500 Conductive Heat Flow Resistance

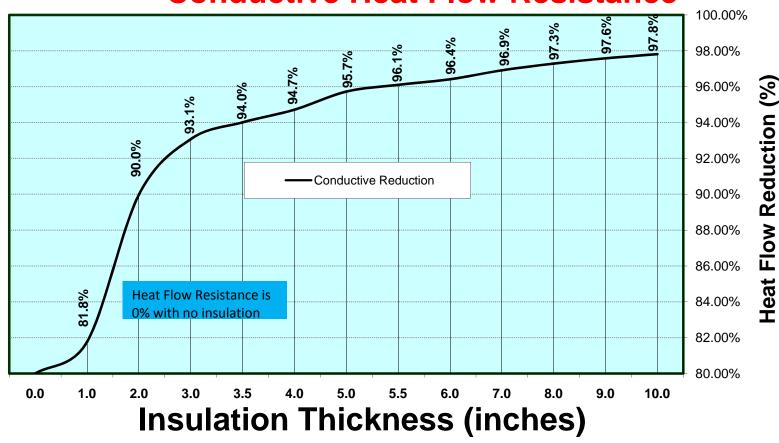

Note: DEMILEC SEALECTION™ 500 is an air-impermeable insulation in accordance with the 2007 Supplement to the 2006 IRC, Chapter 2, Definitions, which defines an air-impermeable insulation as having an air permanence equal to or less than 0.02 L/s-m² at 75 PA pressure differential according to ASTM E 283.